

HYDRACLAW JACK



Tangye's only all steel jack, Hydraclaw's construction makes it ideal for mining engineers tackling heavy lifts with limited working space.

Powerful

5 tonne capacity on head or toe

High Lift

178 mm

Fast Operation

5.5 mm lift per stroke

Stable

Substantial base offers stability under load

Versatile

Horizontal or vertical operation

Safe

Positive stop feature prevents overstroking, pressure relief valve prevents overloading

Ease of Operation

Lifting / lowering controlled smoothly by operating lever, optimised lever effort

Low Clearance


41 mm

Reliable

Jack hydraulics are totally enclosed

Robust Construction

Can withstand rough treatment, ferrous construction has led to its extensive use underground

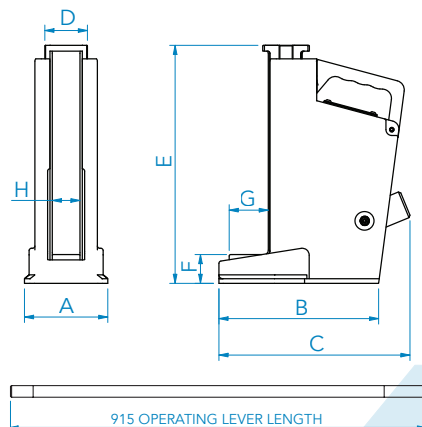

Product Code	9501W
Ram Capacity	5 Tonne
Oil Capacity	0.68 Litres
Weight of Jack	18 kg
Weight of Lever	3.63 kg
Working Pressure	618 bar (8963 PSI)
Maximum Effort on Lever	45 kg
Stroke - mm (ins)	178 (7)
Lift per Stroke - mm (ins)	5.5 (0.21)
Dimensions	mm (ins)
A - Width	114 (4.5)
B - Centre Ram to Face	220 (8.7)
C - Overall Length	260 (10.2)
D - Ram Width	57 (2.2)
E - Height	325 (12.8)
F - Claw Height	41 (1.6)
G - Claw Depth	52 (2)
H - Closed Height	38 (1.5)
Service Kit Number	995125



HI-PRESS HYDRAULICS Ltd
 Authorised Main Distributors of ENERPAC & TANGYE
 Sales & Service of Hydraulic Equipment
 Onsite Hydraulic Testing & Certification

RIVERSIDE WORKS,
 FORGE ROAD, WHALEY BRIDGE,
 HIGH PEAK, SK23 7HY

T: 01663 735089
 sales@hi-press.co.uk