


- Hydrostatic Test Pump supplied complete with tank, skid, handle & gauge
- Range of pressures available (see table below)
- Relief valve fitted as standard
- Compatible with a range of fluid media
- Hoses available on request

- Robust design
- 23Kg total dry weight
- Up to 1000 Bar working pressure
- 16 Litre capacity across the pressure range
- High pressure and low pressure stages with manual change over at pump

HTP – Manually Operated Hydrostatic Test Pumps



Model Number	Model Number (Pump Only)	H.P. Stage (bar)	H.P. Stage (psi)	L.P. Stage (bar)	L.P. Stage (psi)	L.P. Stage Displacement Per Stroke (cc)	H.P. Stage Displacement Per Stroke (cc)	Outlet Port	Suction Port
HTP110	PHO60R0	110	1600	52	750	50.8	22.6	3/8" BSPP	3/8" BSPP
HTP170	PHO50R0	172	2500				14.5		
HTP310	PHO40R0	310	4500				8.1		
HTP440	PHO30R0	448	6500				5.7		
HTP550	PHO20R0	552	8000				4.6		
HTP700	PHO10R0	700	10000				3.6		
HTP1000	PHO00R0	1000	14500				2.5		

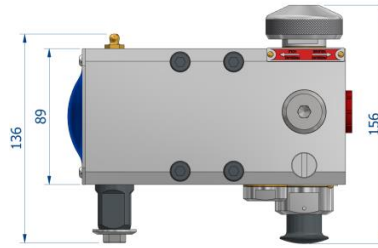

'PHO' RANGE OF PUMPS

UNIT WEIGHT - 4.9Kg

HANDLE LENGTH - 657MM
(NOT SHOWN)



Reservoir	
Part Number	Description
RHTP16	16 Litre reservoir with frame and fittings



Pressure Gauge Kits	
Part Number	Pressure Range (Bar)
GHTK110	0-110
GHTK400	0-400
GHTK700	0-700
GHTK1000	0-1000



Hose (3 metres)			
Part Number	End Fittings	For Use with Pump Models	Max. Working Pressure (Bar)
HHTP310	1/4" BSPP Female	HTP110, HTP170, HTP310	310
HHTP700	1/4" BSPP Female	HTP440, HTP550, HTP700	700
HHTP1000	1/4" BSPP Female	HTP1000	1000

